


210x148mm

### Specification

Socket	
Input	AC 125V
Current frequency	60 HZ
Current	15A

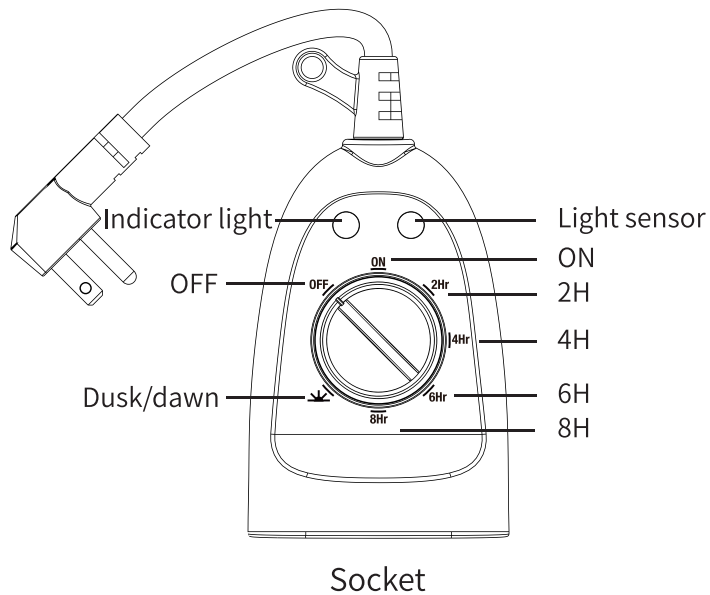


### Instructions

#### 1. Installation

Fix the timer with screw or hook through the hole on its upper left side ; Or plug it into the outdoor rated three-hole grounding socket (Note: Don't plug the timer socket into outlet with extension wire. Avoid placing the socket under strong brightness lighting at Timer. Mode and Dusk/dawn Mode, or it will interfere the light sensor.)

#### 2. Mode settings

Rotate the black dial clockwise or counterclockwise to align the arrow with the pattern.

ON/OFF Mode	ON	Power on device
	OFF	Power off device
Timer Mode	2H	The power will turn on at dusk for 2 hours
	4H	The power will turn on at dusk for 4 hours
	6H	The power will turn on at dusk for 6 hours
	8H	The power will turn on at dusk for 8 hours
Dusk/dawn Mode		The power will turn on at dusk and continue until dawn

#### 3. Description of indicator light

When the timer socket is on, the indicator will flash red.

#### 4. Attention

This timer socket is used for 125V AC/60HZ. Don' t add equipment that exceeds the rated unit value.